


NPS	L	d	NPT	Lo	H	Weight (lb)
1/2"	2.992	0.472	1/2"	6.102	2.972	1.323
3/4"	3.307	0.591	3/4"	7.087	3.287	2.050
1"	3.858	0.787	1"	7.087	3.504	2.899
1 1/4"	4.252	0.984	1 1/4"	8.661	4.370	4.509
1 1/2"	4.685	1.260	1 1/2"	8.661	4.528	6.129
2"	5.315	1.496	2"	10.236	5.000	9.304

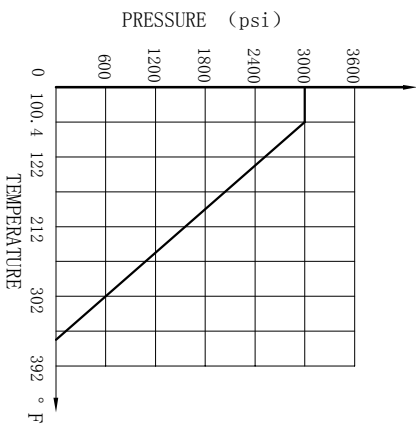

- NOTE:**
1. Design and Manufacture for valve according to ASME B16.34.
 2. Inspection and Test for valve according to API 598.
 3. The connection of screwed for valve according to ANSI B1.20.1.
 4. The fire test for valve according to API 607.

Nominal pressure		3000psi	
Test pressure	Shell test	311	Test medium
	Seal test	22.8	
Gas seal test	0.6	Water temperature	Normal temperature
Applicable medium		Water, Oil, Gas	
Applicable temperature		-20~356°F	

11	HANDLE	1	STAINLESS STEEL
10	GLAND	1	304
9	PACKING	1	RPTE
8	STEM WASHER	1	RPTE
7	STEM	1	A276 316
6	BODY	1	A351 CF8M
5	BALL	1	SS316
4	O-RING	1	NBR
3	SEAT	2	RPTE
2	GASKET	1	RPTE
1	BONNET	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
MARK BEFORE MODIFIED		AFTER MODIFIED	
DRAWN	DATE	SCALE	
ANIX VALVE USA		2PC Ball Valve	
3000PSI, NPT, Fire Safe		FBV12R6N/3000	