

GA11H-Threaded Gate Valve-Class 800




GENERAL CHARACTERISTICS

- Reduced-port
- Rising stem
- Solid disc
- Design:API 602
- Test:API 598
- End Connections:Threaded End
- Threaded Type:ANSI B1.20.1(NPT) ISO 7/1(BSPT,BSP)

WORKING CONDITIONS


- Working Pressure:Class 800
- Temperature Range:-20° to 797°F
- Applicable medium:Water,Oil,Gas

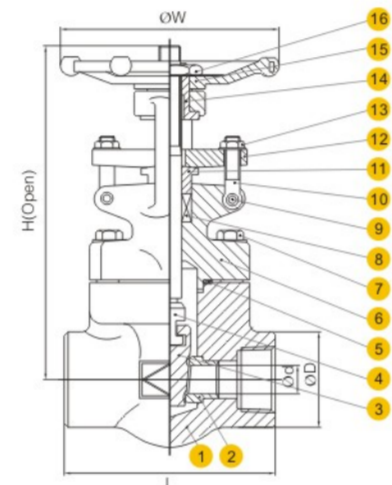

MATERIALS LIST

No.	DESCRIPTION	Q'TY	MATERIAL
16	NUT	1	1035
15	HANDWHEEL	1	KTH330-08
14	STEM NUT	1	1035
13	NUT	2	1035
12	GLAND FLANGE	1	1020
11	GLAND	1	1020
10	EYE BOLT	2	1035
9	PIN	2	1035
8	PACKING	1	Graphite
7	BOLT	4	1035
6	BONNET	1	A105
5	GASKET	1	SS304+Graphite
4	STEM	1	13Cr
3	DISC	1	13Cr+STL
2	SEAT RING	2	13Cr
1	BODY	1	A105

Note:Please contact us for other material requirements.

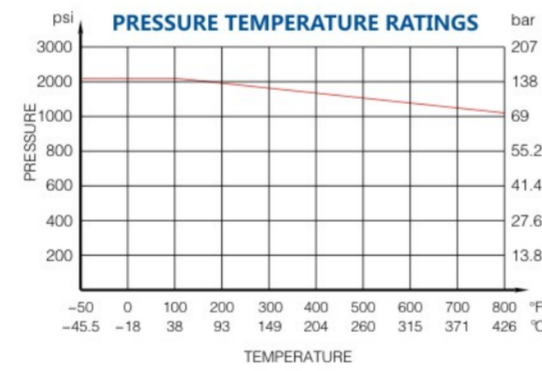

DIMENSIONS-Class 800

SIZE	L	d	D	W	H	Weight(lb)
3/8"	2.95	0.39	1.3	3.54	6.10	-
1/2"	3.11	0.41	1.42	3.94	6.38	
3/4"	3.62	0.51	1.61	3.94	6.50	
1"	4.37	0.69	1.97	4.92	7.99	
1 1/4"	4.72	0.91	2.28	6.3	8.66	
1 1/2"	4.72	1.1	2.6	6.3	10.04	
2"	5.51	1.42	3.07	7.09	11.42	

GA61H-Socket Welding Gate Valve-Class 800




GENERAL CHARACTERISTICS

- Reduced-port
- Rising stem
- Solid disc
- Design:API 602
- Test:API 598
- End Connections:Socket welding

WORKING CONDITIONS


- Working Pressure:Class 800
- Temperature Range:-20° to 797°F
- Applicable medium:Water,Oil,Gas

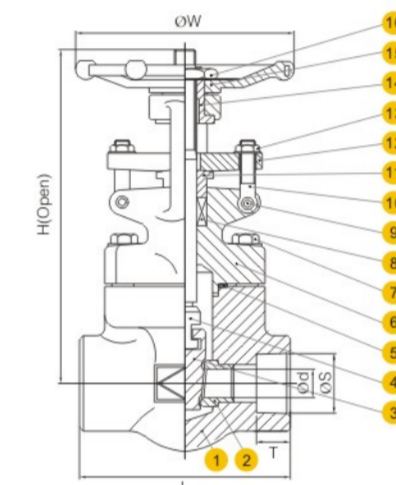

MATERIALS LIST

No.	DESCRIPTION	Q'TY	MATERIAL
16	NUT	1	1035
15	HANDWHEEL	1	KTH330-08
14	STEM NUT	1	1035
13	NUT	2	1035
12	GLAND FLANGE	1	1020
11	GLAND	1	1020
10	EYE BOLT	2	1035
9	PIN	2	1035
8	PACKING	1	Graphite
7	BOLT	4	1035
6	BONNET	1	A105
5	GASKET	1	SS304+Graphite
4	STEM	1	13Cr
3	DISC	1	13Cr+STL
2	SEAT RING	2	13Cr
1	BODY	1	A105

Note:Please contact us for other material requirements.

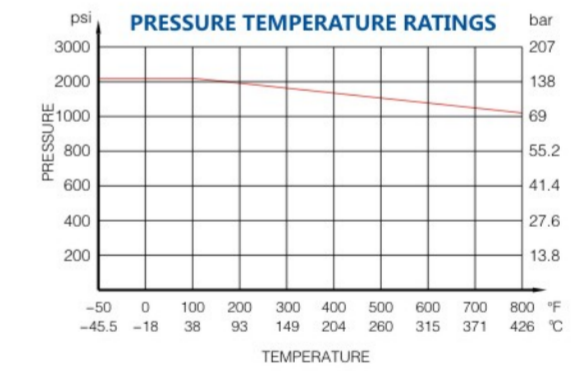

DIMENSIONS- Class 800

SIZE	L	d	S	T	W	H	Weight(lb)
1/2"	3.11	0.41	0.89	0.39	3.94	6.38	-
3/4"	3.62	0.51	1.12	0.43	3.94	6.50	
1"	4.37	0.69	1.36	0.47	4.92	7.99	
1 1/4"	4.72	0.91	1.69	0.55	6.3	8.66	
1 1/2"	4.72	1.1	1.93	0.59	6.3	10.04	
2"	5.51	1.42	2.41	0.63	7.09	11.42	