


NPS	L	NPT	H	Weight (lb)
1/2"	2.480	1/2"	1.850	0.573
3/4"	2.953	3/4"	2.244	0.485
1"	3.504	1"	2.599	0.573
1 1/4"	4.016	1 1/4"	2.953	0.816
1 1/2"	4.567	1 1/2"	3.465	1.499
2"	5.433	2"	3.976	1.852
2 1/2"	7.087	2 1/2"	4.725	2.557
3"	7.874	3"	5.315	3.836

Nominal pressure			800Psi			
Test pressure	Shell test	8.3	Test medium	Water	Test temperature	Normal temperature
	Seal test	6.1		Air		
Gas seal test	0.6		Applicable medium	Water, Oil, Gas		
Applicable temperature			-20 ~ 302°F			

NOTE:

1. Design and Manufacture for valve according to ASME B16.34.
2. Inspection and Test for valve according to API 598.
3. The connection of screwed for valve according to ANSI B1.20.1.

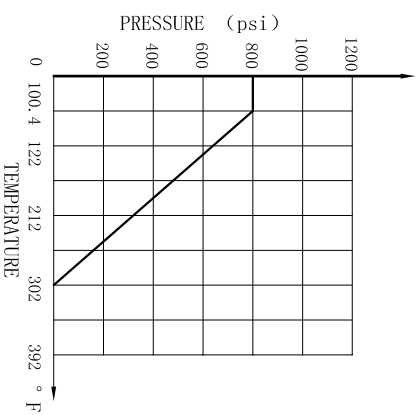

4	BONNET	1	A351 CF8M
3	GASKET	1	PTFE
2	SCREEN MESH	1	SS316
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
ANIX®			
			ANIX VALVE CO., LTD
MARK	BEFORE MODIFIED	AFTER MODIFIED	SCALE
DRA.		APP.	Y-Strainer 800PSI, NPT
CHK.		DATE	YS11F6N/800