


Nominal pressure		2000 psi	
Test pressure	Shell test	20.7	Test medium
	Seal test	15.2	
Gas seal test	0.6		Test temperature
			Normal temperature
Applicable medium		Water, Oil, Gas	
Applicable temperature		-20 ~ 302°F	

NOTE:
 1. Design and Manufacture for valve according to ASME B16.34.
 2. Inspection and Test for valve according to API 598.
 3. The connection of screwed for valve according to ANSI B1.20.1.

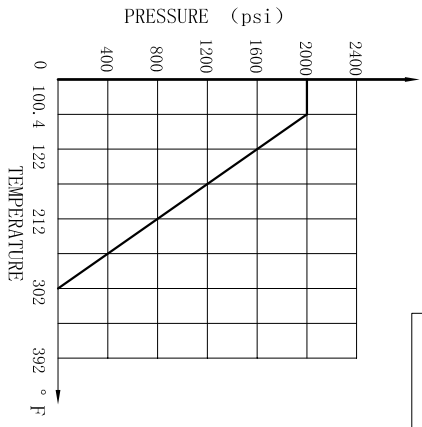

NPS	L	d	NPT	Lo	H	Weight (lb)
1/2"	2.559	0.591	1/2"	4.724	2.599	0.981
3/4"	2.953	0.787	3/4"	5.512	2.972	1.411
1"	3.465	0.984	1"	6.299	3.110	2.216
1 1/4"	3.898	1.260	1 1/4"	7.087	3.622	3.627
1 1/2"	4.370	1.496	1 1/2"	7.874	4.331	5.082
2"	5.197	1.969	2"	8.662	4.626	9.270

12	NUT	1	A194 8
11	SPRING WASHER	1	304
10	HANDLE	1	STAINLESS STEEL
9	GLAND	1	304
8	PACKING	1	PTFE
7	STEM WASHER	1	PTFE
6	STEM	1	A276 316
5	BODY	1	A351 CF8M
4	BALL	1	SS316
3	SEAT	2	PTFE
2	GASKET	1	PTFE
1	BONNET	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
MARK BEFORE MODIFIED		AFTER MODIFIED	
DRW.	DATE	SCALE	
CHK.	DATE	ANIX®	
		ANIX VALVE CO., LTD	
		2PC Ball Valve	
		2000PSI, NPT, Fire Safe	
		FBV12F6N/2000	