


NPS	L	d	NPT	H	Weight (lb)
1/2"	2.559	0.591	1/2"	1.634	0.617
3/4"	2.953	0.787	3/4"	1.811	0.926
1"	3.543	0.984	1"	2.126	1.411
1 1/4"	4.134	1.260	1 1/4"	2.283	2.161
1 1/2"	4.724	1.496	1 1/2"	2.618	2.976
2"	5.512	1.969	2"	2.913	4.497
2 1/2"	6.496	2.520	2 1/2"	3.504	7.937
3"	7.284	2.992	3"	4.036	11.629

Nominal pressure			200psi			
Test pressure	Shell test	2.1	Test medium	Water	Test temperature	Normal temperature
	Seal test	1.6		Air		
Gas seal test	0.6					
Applicable medium			Water, Oil, Gas			
Applicable temperature			-20 ~ 302°F			

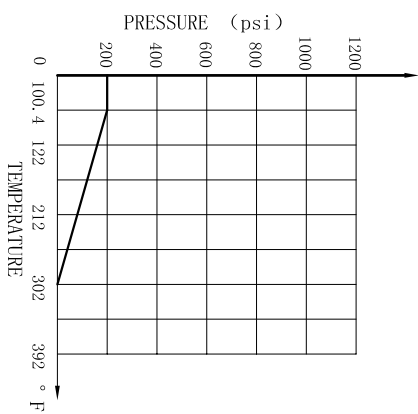

NOTE:  
 1. Design and Manufacture for valve according to ASME B16.34.  
 2. Inspection and Test for valve according to API 598.  
 3. The connection of screwed for valve according to ANSI B1.20.1.

7	BOLT	1	A193 B8M
6	WASHER	1	PTFE
5	BONNET	1	A351 CF8M
4	GASKET	1	PTFE
3	DOWEL	1	A276 316
2	DISC	1	A351 CF8M
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
MARK BEFORE MODIFIED		AFTER MODIFIED	
DRAW.	DATE	APP.	DATE
CHK.	DATE		
		SCALE	
ANIX VALVE CO., LTD		Swing Check Valve	
200PST, NPT		CV14W6N/200	